

DEFINING RUGGED

EXCEPTIONAL ENGINEERING | ROCK SOLID | EXTENSIVE TESTING

STANDARD-ADJUSTABLE UPPER POLES


Placement	Height Adjustability	Weight	Height	Width	Depth
Inserts into: - 7" <i>Lower Tube</i> (Item No. DS-LOWER-7) - 9" <i>Lower Tube</i> (Item No. DS-LOWER-9) - 13" <i>Lower Tube</i> (Item No. DS-LOWER-13) - Vehicle Base that has a welded lower tube	Allows 2.18" - 5.76" adjustment above lip of <i>Lower Tube</i>	4.1 lbs	9.25"	3.5"	12.0"

Features:

- Heavy gauge steel construction for long-term durability
- Black powdercoat finish for maximum corrosion resistance
- Any **Motion Attachment** can be mounted on top of the *Upper Pole*
- Wrench is needed for left/right rotational adjustments and height adjustments

Key Dimension - Determines How Far Equipment Extends Away From Pole

Item No. **DS-UPPER-L**

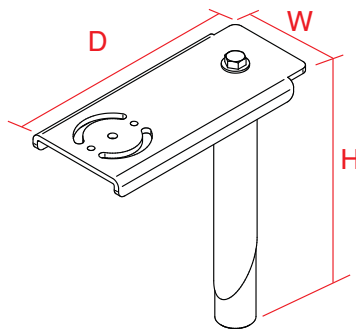

3001 Borham Ave. | Stevens Point, WI 54481, USA
Phone: 715.344-3482 | Toll-free: 800.487-9220 | Fax: 715.344-5209
Email: gamberj@gamberjohnson.com | Website: www.gamberjohnson.com

This document, including images, may not be reproduced partly or fully without the expressed written consent of Gamber-Johnson's Marketing Department. © Copyright 2012 Gamber-Johnson LLC